



SHADE-MAX - Phoenix, AZ



## How many SHADE-MAX kits do I need?



Follow these simple rules:


- Every screen requires at least 1 SHADE-MAX kit regardless of size.
- One **SHADE-MAX** bracket should be mounted 1 ft from every screen corner.
- Any screen span 3 ft or greater requires another **SHADE-MAX** bracket
- If you have screens that are adjacent, consider using the “T” configuration for efficiency

See figures below for examples **SHADE-MAX** installations.

If you have questions please e-mail [info@sshade-max.com](mailto:info@sshade-max.com) for prompt service.

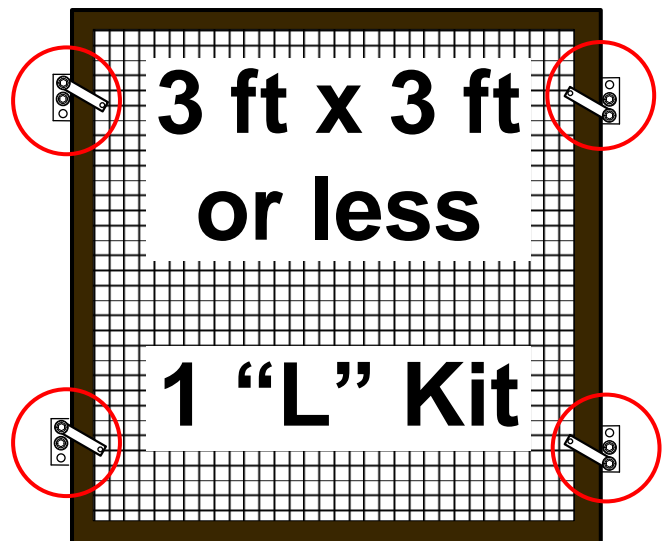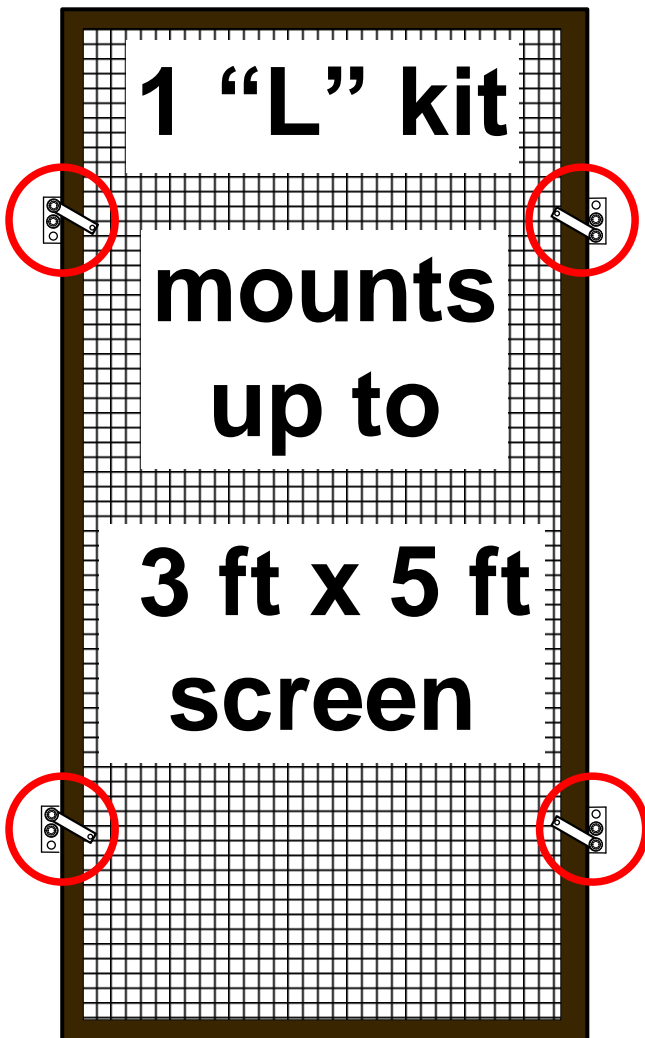

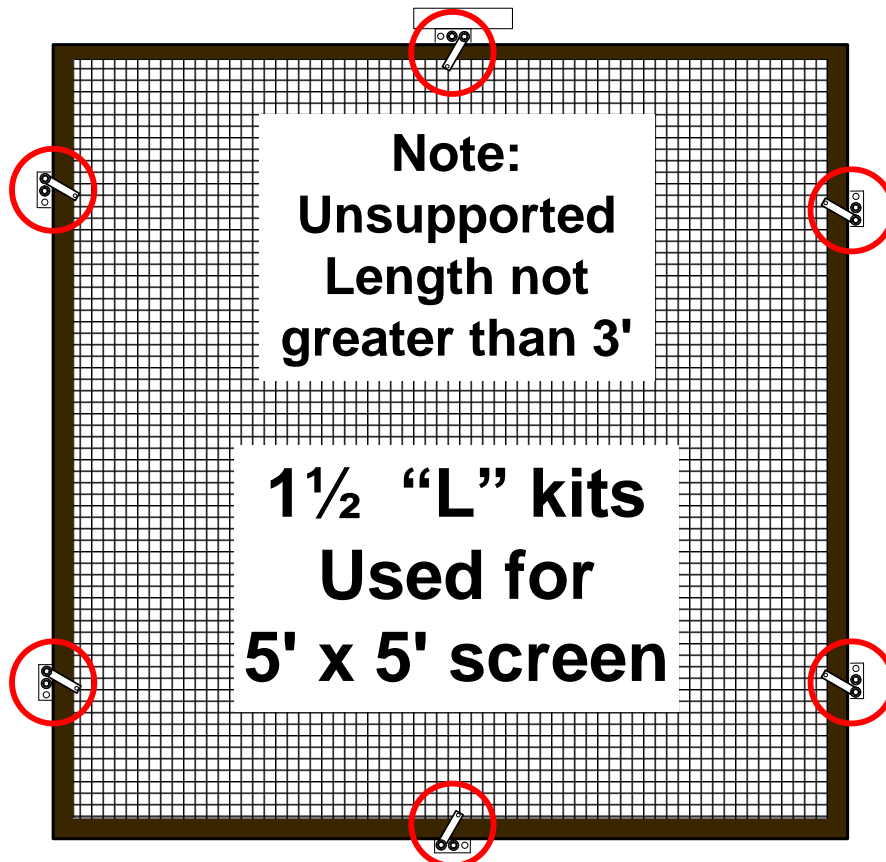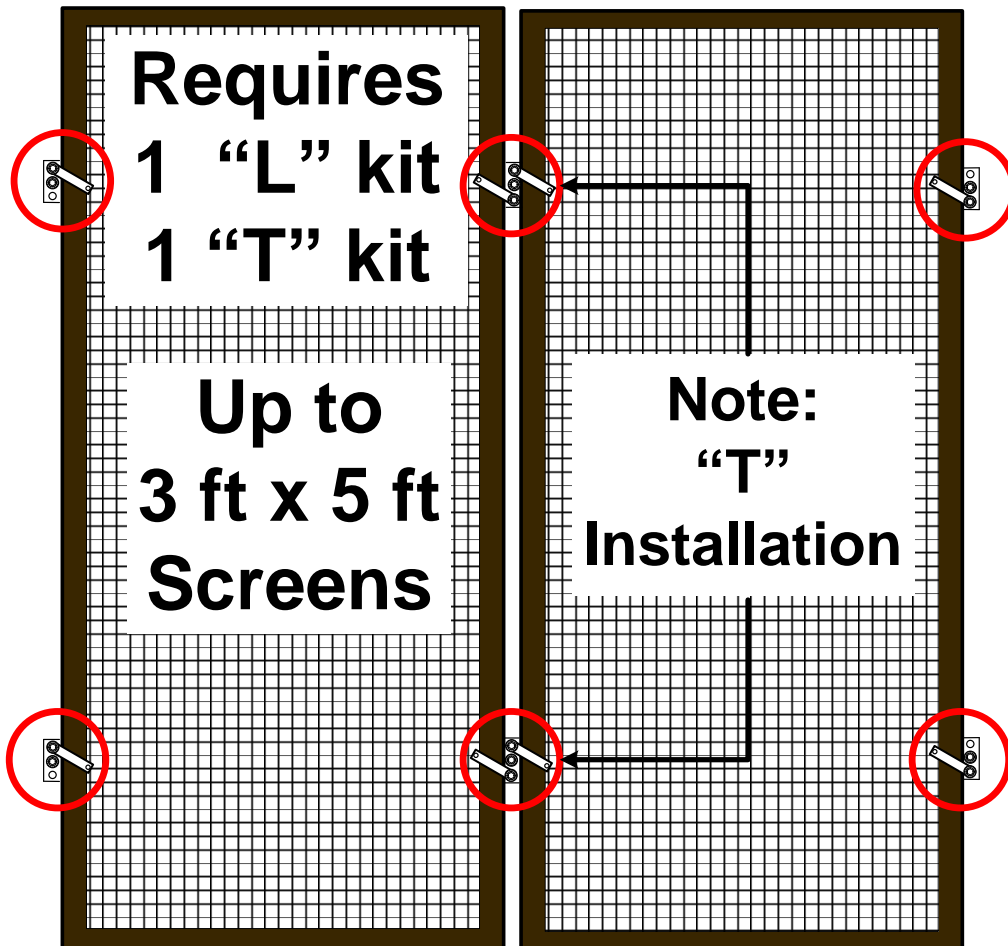

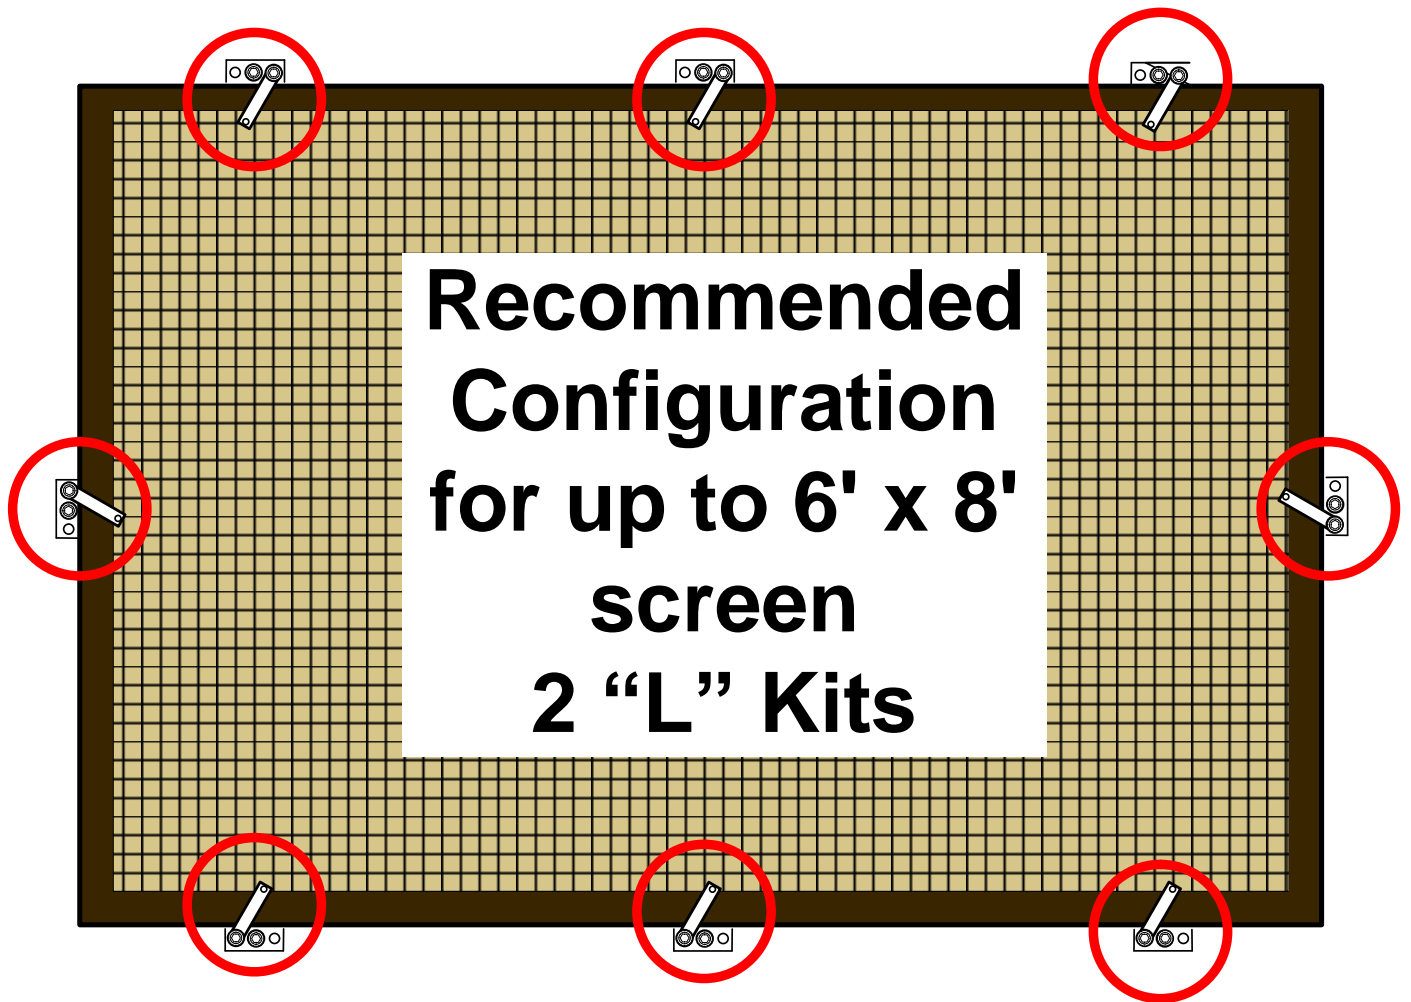

Screens up to 6' x 8' use 2 "L" kits. In some cases, smaller gage screen frames may benefit from 2 additional clamps on the right and left side. (4 on left/right and 6 on top/bottom.)

## Installation Instructions and Hints:

- Consider using the existing clamp holes to minimize window penetrations
- If reusing the existing clamp locations, BEFORE removing your screens, mark the current clamp screw locations with a pencil on the screen frame. Use this alignment as a starting point for installation.
- Seal any non-used holes with a 3/8 or 1/4 inch # 8 self tapping screw (Available from most hardware stores) or a clear silicone caulk.
- Install the bracket first. Use your hand to position and hold the bracket and tighten until unable to move (Typically a #1 or #2 setting on a battery operated drill). If the hole is stripped, a #10, 1 ½ inch screw will fit but must be purchased (Available from most hardware stores).
- START the GRABBERS in the platforms with the provided screws before trying to install the screen. Only a turn or two is required.
- Position so they will swing over the platform when tightened (See below). The proper hole to use for the GRABBER is:
  - Left hand in top hole
  - Right hand in bottom hole
  - Top in right hole
  - Bottom in left hole



Left Hand



Right Hand



Top



Bottom